

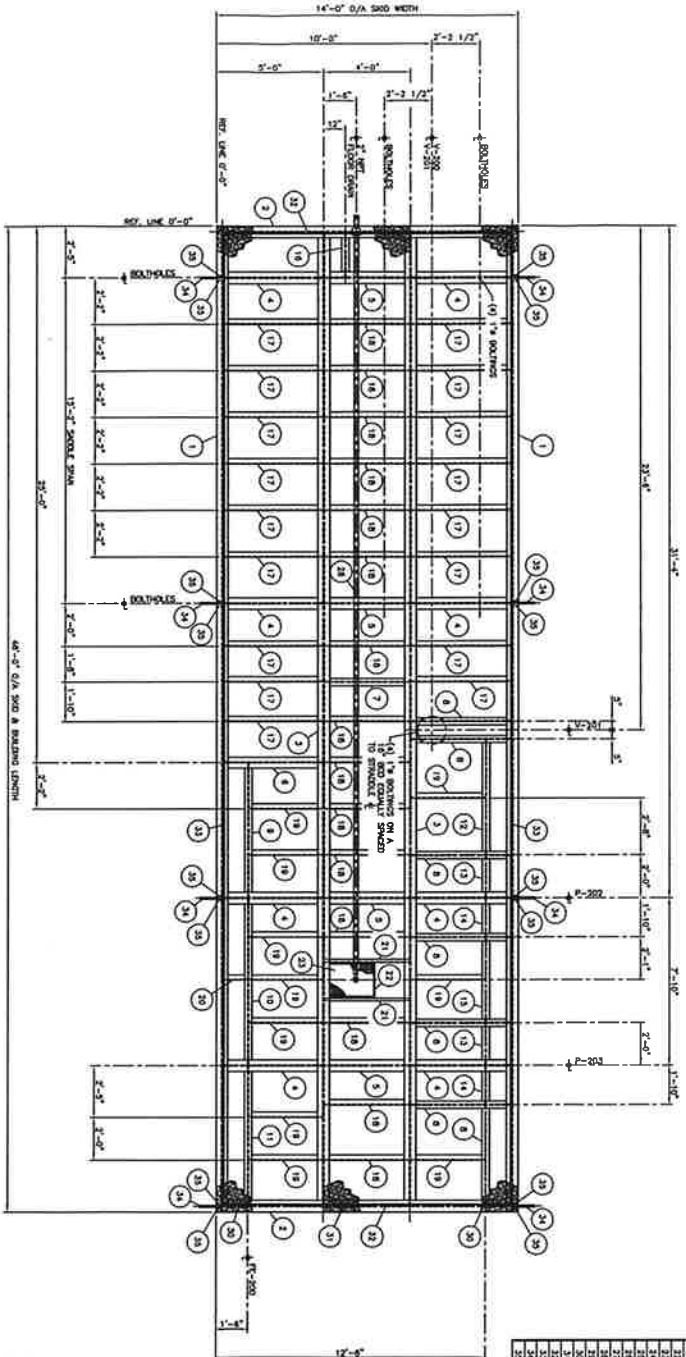


BILL OF MATERIALS

[illegible]

- NOTES**
- 1) TOP OF CHORDER PLATE EXTENDED DISTANCE 0'-0"
 - 2) CHORDER PLATE SEAMS TO BE SQA WELDED.
 - 3) CHORDER PLATE REINFORCED TO BE STITCH WELDED.
 - 4) CHORDER PLATE TO BE STITCH WELDED TO ALL SUPPORTS.
 - 5) COAT THE INSIDE SURFACE WITH A 7' COAT MIN. F-12 DARK GREY DURAL.
 - 6) IF THIS APPROXIMATE 350 MILES 25,000 lbs. (10,453 kg).
 - 7) THE ULTIMATE TENSION TO BE ADDED TO THE UNDERCUT OF SEAL.

PRESSON
MANUFACTURING LTD.
ENGINEERING — DESIGN — FABRICATION

Q	STATUS FOR CONTINUATION	DATE	BY
1	STATUS FOR APPROVAL	01/09/28	
2		01/09/29	
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			
27			
28			
29			
30			
31			
32			
33			
34			
35			
36			
37			
38			
39			
40			
41			
42			
43			
44			
45			
46			
47			
48			
49			
50			
51			
52			
53			
54			
55			
56			
57			
58			
59			
60			
61			
62			
63			
64			
65			
66			
67			
68			
69			
70			
71			
72			
73			
74			
75			
76			
77			
78			
79			
80			
81			
82			
83			
84			
85			
86			
87			
88			
89			
90			
91			
92			
93			
94			
95			
96			
97			
98			
99			
100			

WEST LARISE PROJECT
c-97-6/94-B-9