


| ITEM | QTY | MEMBER DESIGNATION | MATERIAL GRADE | LENGTH (in) |
|------|-----|---------------------------|----------------|-------------|
| 1 | 2 | W8x35 | 44W | 140" |
| 2 | 2 | W8x35 | 44W | 85 1/8" |
| 3 | 2 | C6x8.2 | 44W | 85 1/8" |
| 4 | 3 | C6x8.2 | 44W | 72 13/16" |
| 5 | 2 | NPS 3" ROLL END | SA106B | 92" |
| 6 | 1 | CHECKER PLATE, 3/16" thk. | 44W | 96" x 120" |

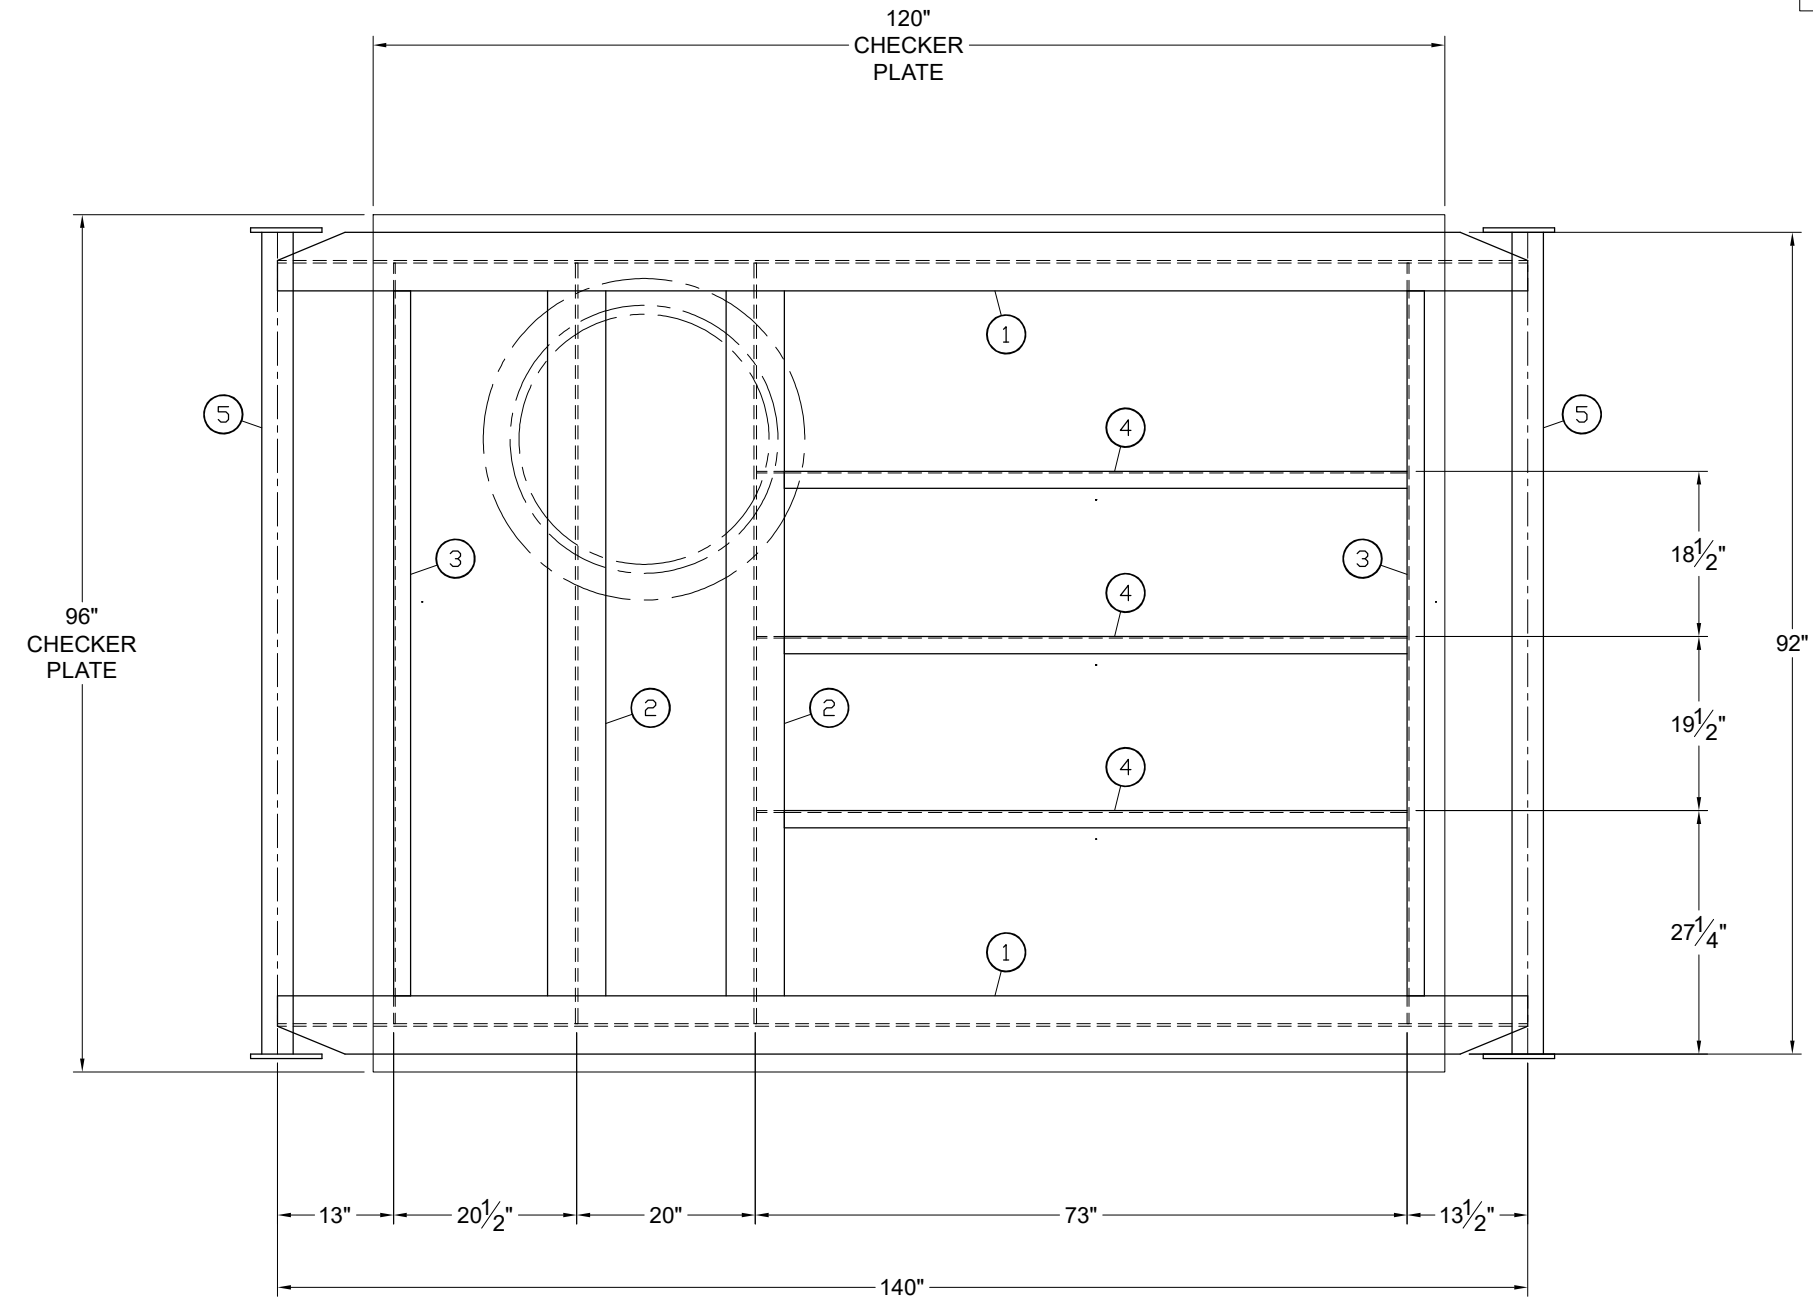

PLAN VIEW

JOB NO: 1406

30" OD x 10'-0" S/S VERTICAL SEPARATOR PKG
SKID DETAILS



OTG OILFIELD EQUIPMENT LTD.
53 BURNT LAKE CRESCENT
Red Deer, AB, T4S 0K6
PHONE: (825)-221-9500

| | | | |
|--------------------|--------------------|---------------|------------------|
| DRAWN: MC | DATE: 24-02-15 | CHECKED: | DATE: |
| APPROVED: | DATE: | SCALE: NTS | SHEET: 1 OF 1 |
| UNIT#: OTG-1406 | DWG NO: 1406-03 | REV. 0 | |

| NO. | DATE | REVISION | BY | APP |
|-----|----------|----------|----|-----|
| 0 | 24-02-15 | EXISTING | MC | WS |